ACOSTA RESIDENCE

New single-family residence, Eaton Fire rebuild · 220 Laurel Dr, Altadena CA 91001

3D massing, from the street (for reference)



SHEET INDEX

SHEET	TITLE
A-0	Cover, vicinity map, project data, code analysis
A-1	Site plan
A-2	Floor plan, door and window schedules
A-3	Roof plan
A-4	Exterior elevations
A-5	Building sections
A-6	Fire-zone details (CRC R337)
A-7	Attic and structural loads plan
S-	Structural (by the structural engineer)
C-	Grading, drainage, parkway (by the civil)
T-24	Energy compliance (CF1R), solar-ready
CALGreen	Green building checklist


SCOPE OF WORK
New one-story, all-electric single-family residence (4 bedrooms, 3 baths) with an attached open carport, replacing the house destroyed in the Eaton Fire. Demolition of the remaining retaining wall and chimney, grading and drainage per civil, new driveway, utilities (water, sewer, electric; no gas). Fire sprinklers throughout.

PROJECT TEAM
Owner: Richard Acosta
Plans prepared by: _____
Structural engineer: _____
Civil engineer: _____
Energy consultant: _____
Fire sprinkler designer: _____

DEFERRED SUBMITTALS

#	ITEM
1	Fire sprinkler plans and calculations (NFPA 13D), before the final foundation inspection
2	Roof truss drawings and calculations (truss manufacturer), reviewed by the engineer of record
3	Solar PV (future, separate permit): not required for fire rebuilds (EO N-29-25); the house is solar-ready (Energy Code 110.10)

VICINITY MAP

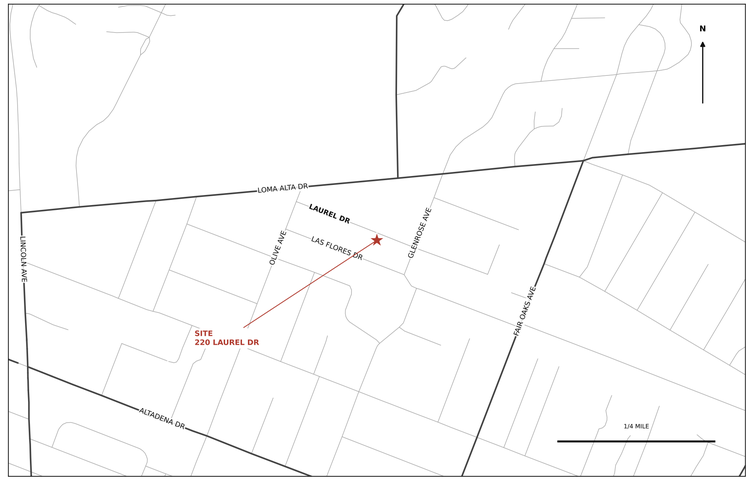

Altadena, unincorporated Los Angeles County. Streets © OpenStreetMap contributors (ODbL).

PROJECT DATA

ITEM	PROJECT
Address / APN	220 Laurel Dr, Altadena CA 91001 · APN 5832-003-027 (lot 27)
Zoning	R-1-7500 · Altadena CSD · Disaster Recovery Permit (non-like-for-like)
Fire zone	Very High Fire Hazard Severity Zone
Lot	113.00' x 64.77' = 7,319 sq ft
Floor area	2,226 sq ft (to outside of walls)
Porch / carport	37 / 396 sq ft
Lot coverage	2,660 sq ft (36.3%); limit 2,830 (Altadena CSD)
Height	1 story, ~17'-5⅛" above finished floor (30' limit)
Bedrooms / baths	4 / 3
Parking	2 covered (carport)

CODE ANALYSIS

ITEM	PROJECT
Codes	2022 California Residential, Building, Electrical, Mechanical, Plumbing, Energy, Fire and Green Building Standards Codes, as allowed for fire rebuilds by Executive Order N-29-25; LA County Title 26
Occupancy	R-3 single-family dwelling; U open carport (attached)
Construction	Type V-B; automatic fire sprinklers throughout (NFPA 13D)
Fire zone	VHFHSZ: wildland-urban interface construction, CRC R337 (A-6)
Energy	All-electric; Title 24 Part 6 by the energy consultant; solar PV and battery not required for fire rebuilds (EO N-29-25): solar-ready (110.10), mounting attachments installed with the roof, panels later (separate permit)
Green building	CALGreen mandatory measures (checklist)

GENERAL NOTES
1. Work shall comply with the codes listed and the conditions of approval.
2. Do not scale drawings; dimensions govern. Verify on site.
3. Structural, civil and energy documents govern their own scope.
4. Special inspections and structural observation per the structural engineer.
5. Smoke and CO alarms per A-2; fire sprinklers per the deferred submittal.

ACOSTA RESIDENCE

Single-family residence
fire rebuild (Eaton Fire)

220 Laurel Dr
Altadena, CA 91001
APN 5832-003-027

Zone R-1 · Altadena CSD
Very High Fire Hazard
Severity Zone

Owner: Richard Acosta

Prepared by: _____

Structural: by engineer
(separate sheets)


DRAFT FOR REVIEW
not for construction

Date: October 15, 2026
Revision date: October 28, 2026

© 2026 Richard Acosta.
All rights reserved.
These drawings are for
220 Laurel Dr only. Not to
be copied, adapted, sold
or built from on any
other site.

COVER SHEET, PROJECT DATA, CODE ANALYSIS

A-0

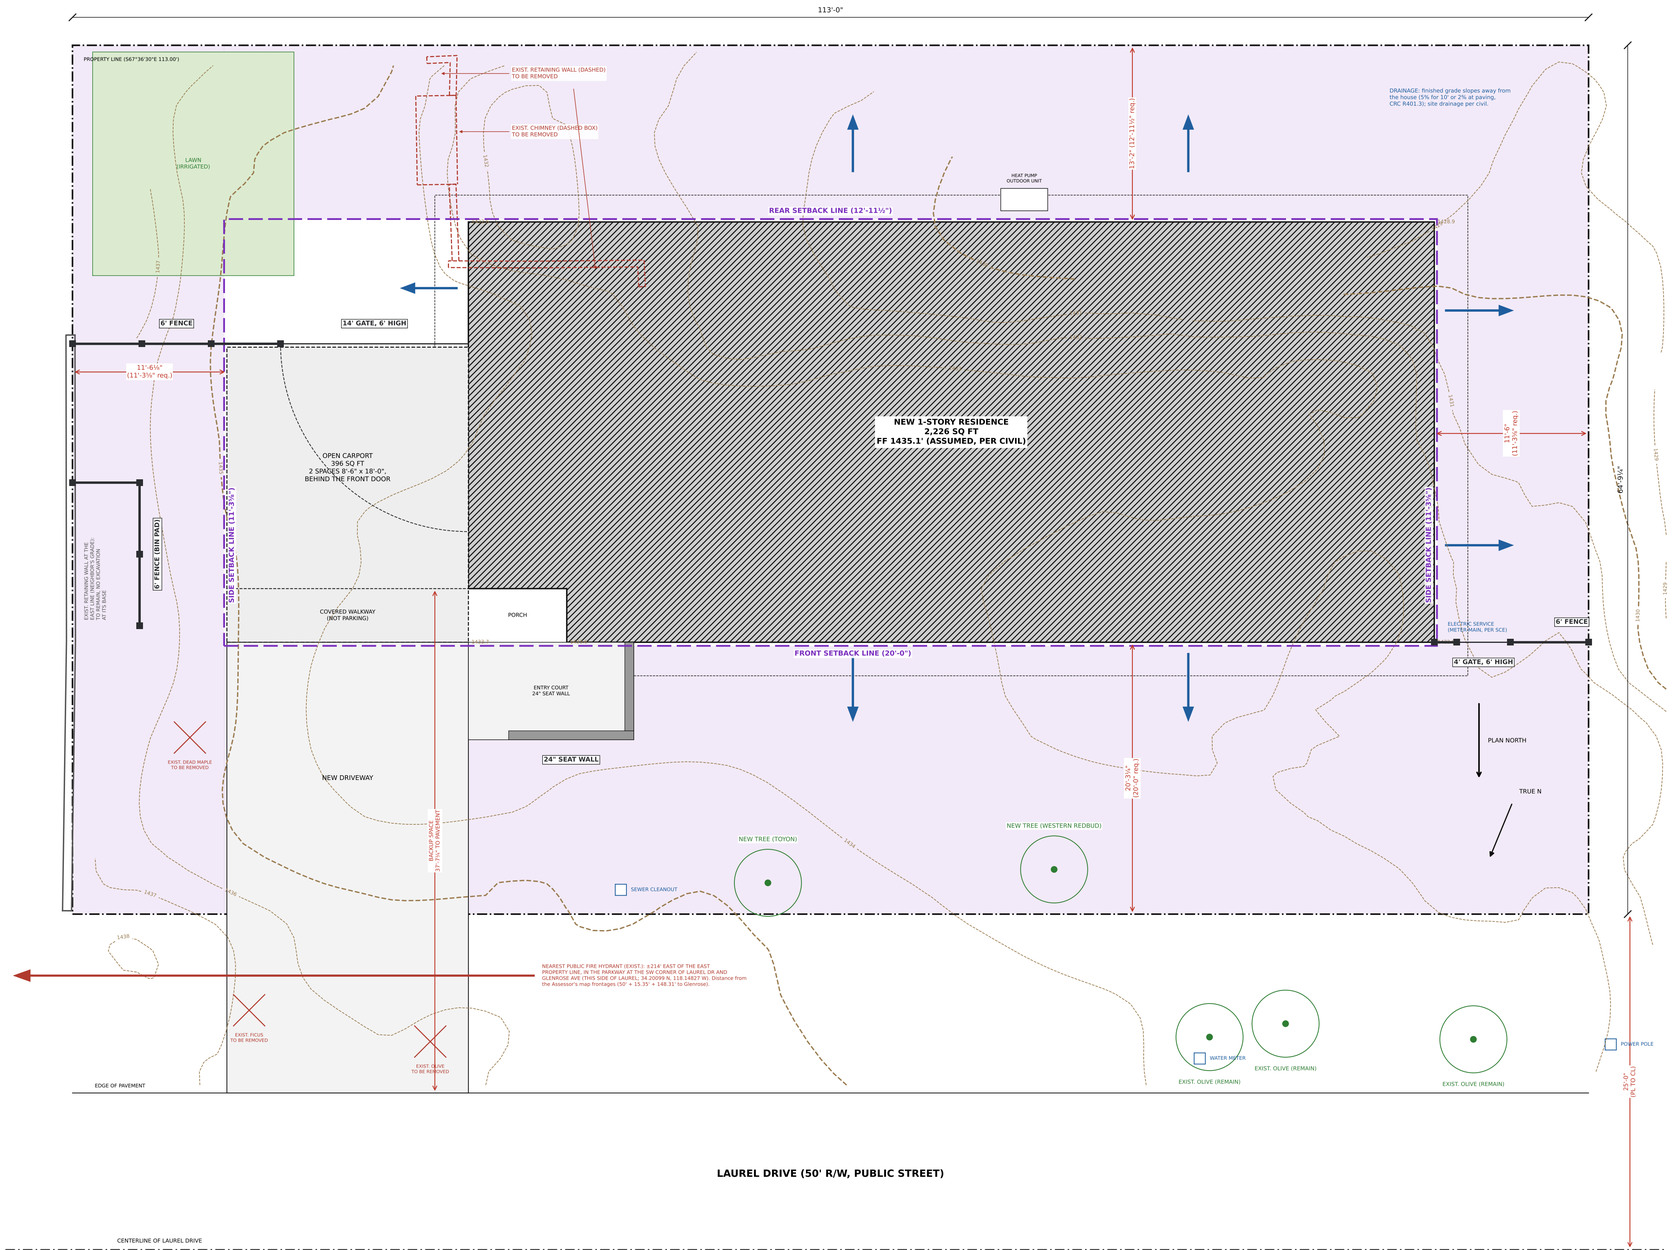

SITE PLAN 3/16" = 1'-0"

SITE NOTES

1. Lot lines, existing trees, utilities, spot elevations and 1' contours (dashed) from the owner's topographic survey.
2. Finished floor elevation, grading and drainage per civil (separate sheets).
3. Eaves (dashed) 2'-6"; the rear 2'-0" so its gutter stays within the 2'-6" projection (LACC 22.110.090).
4. West parkway olives protected during construction (root zones); the dead maple and the east parkway olive and ficus removed (County permit; parkway sheet per civil, with Public Works).
5. Ember-resistant zone under the eaves and 5' beyond them; planting per the fuel modification plan (FM-1).
6. Water, sewer and SCE service per the utilities; no gas service (all-electric).
7. Demolition: remove the remaining retaining wall and chimney from the burned house (dashed red); asbestos survey first if required (SCAQMD Rule 1403); fill and grade per civil.
8. The retaining wall along the east line holds the neighbor's higher grade: protect it in place.
9. Setbacks are to the FINISHED outside face of the exterior walls (stucco), not the slab edge or framing; front, rear and side margins are only 2-3 1/4". Wall: 2x6, 1" rigid insulation, 7/8" stucco. Lay out the slab and framing back from the drawn finished face. A licensed surveyor stakes the corners and checks the foundation forms against the setback lines before the pour (form survey).
10. Legal access: direct frontage on Laurel Drive, a public street; no access easements needed.
11. Parking: 2 covered spaces (carport), 8'-6" x 18'-0", backing out over the driveway to the street.
12. Not applicable: bike parking (single-family); on-site access roads; septic and wells (public sewer and water); no oak trees on the site.
13. Fences: new 6' fences and gates as shown; existing property-line fences and walls to remain.

ACOSTA RESIDENCE

Single-family residence
fire rebuild (Eaton Fire)

220 Laurel Dr
Altadena, CA 91001
APN 5832-003-027

Zone R-1 · Altadena CSD
Very High Fire Hazard Severity Zone

Owner: Richard Acosta

Prepared by: _____

Structural: by engineer (separate sheets)


DRAFT FOR REVIEW not for construction

Date: October 15, 2026
Revision date: October 28, 2026

© 2026 Richard Acosta. All rights reserved. These drawings are for 220 Laurel Dr only. Not to be copied, adapted, sold or built from on any other site.

SITE PLAN

A-1

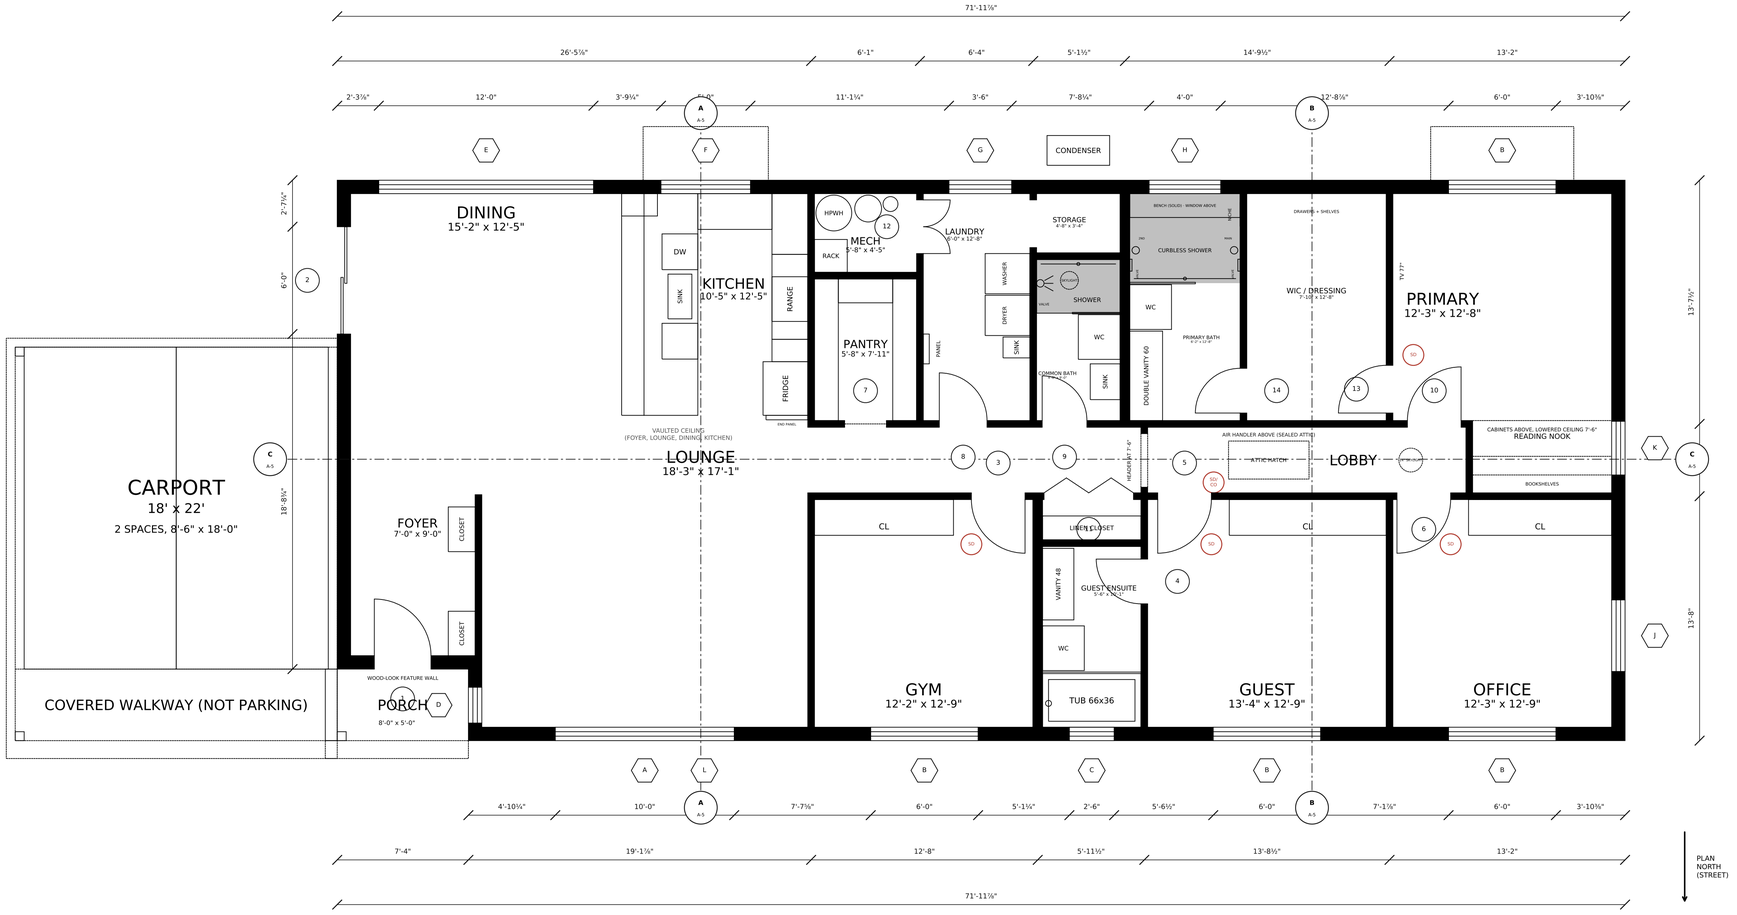

FLOOR PLAN 1/4" = 1'-0"

GENERAL NOTES

1. Dimensions are to wall centrelines; exterior walls to the outside face of framing + finish (9" walls).
2. Walls: exterior 2x6 with 1" rigid insulation and stucco; interior 2x4; plumbing walls 2x6.
3. Ceilings 9'-0" unless noted. The foyer, lounge, dining and kitchen are vaulted under the roof (see sections).
4. Doors 8'-0" high unless noted; interior doors solid core. Exterior doors and glazing per CRC R337 (VHFHSZ).
5. All exterior glazing dual-pane with at least one tempered pane (CRC R337.8.2.1). Fully tempered where noted (CRC R308.4).
6. Bedroom windows meet emergency escape: 5.7 sq ft net clear, 20" min width, 24" min height, sill 44" max (CRC R310).
7. Smoke alarms: hard-wired, interconnected, battery backup, at least 3' from bathroom doors (CRC R314), supply registers and ceiling fan blade tips (NFPA 72). Combination smoke / CO alarms outside the sleeping areas.
8. All-electric: heat pump HVAC (air handler in the sealed attic; outdoor unit at the rear wall), heat pump water heater (HPWH) in the mechanical closet. Whole-house ventilation by a continuous exhaust fan.
9. Fire sprinklers throughout (NFPA 13D); plans by the sprinkler designer (deferred submittal).
10. Attic access in the hall: 22" x 54" insulated, gasketed access panel (passes the air handler), 30" min headroom above (CRC R807.1).
11. Furniture not shown; closets, cabinets and fixtures shown for reference.

DOOR SCHEDULE

TAG	LOCATION	SIZE (W x H)	TYPE	NOTES
1	PORCH / FOYER (exterior)	3'-0" x 8'-0"	Hinged	Solid core 1-3/8"+ or noncombustible (CRC R337.8.3); weatherstripped; glass lite, if any, dual-pane tempered
2	DINING (exterior)	6'-0" x 8'-0"	Sliding glass door	Dual-pane tempered glazing (CRC R308.4.1, R337.8.2); weatherstripped
3	GYM / LOBBY	3'-0" x 8'-0"	Hinged	
4	GUEST ENSUITE / GUEST	2'-6" x 8'-0"	Hinged	
5	GUEST / LOBBY	3'-0" x 8'-0"	Hinged	
6	OFFICE / LOBBY	3'-0" x 8'-0"	Hinged	
7	LOBBY / PANTRY	2'-4" x 8'-0"	Pocket	Pocket frame; its pocket runs past the pantry	laundry wall, which stops at the frame (no tee)
8	LOBBY / LAUNDRY	2'-8" x 8'-0"	Hinged	
9	LOBBY / COMMON BATH	2'-6" x 8'-0"	Hinged	
10	LOBBY / PRIMARY	3'-0" x 8'-0"	Hinged	
11	LOBBY / LINEN CLOSET	5'-0" x 8'-0"	Bifold	
12	MECH / LAUNDRY	3'-0" x 6'-8"	Pair, hinged, louvered	louvered (water heater air: check the model's free-area requirement); stock 6'-8" height, drywall above
13	WIC / DRESSING / PRIMARY	2'-8" x 8'-0"	Hinged	
14	PRIMARY BATH / WIC / DRESSING	2'-6" x 8'-0"	Hinged	

WINDOW SCHEDULE

TAG	QTY	LOCATION	SIZE (W x H)	SILL	OPERATION	NOTES
A	1	Lounge	10'-0" x 5'-6"	2'-6"	Fixed center, slider each end	
B	4	Gym, Guest, Office, Primary	6'-0" x 5'-6"	2'-6"	Horizontal slider	Emergency escape (note 6)
C	1	Guest Ensuite	2'-6" x 1'-6"	6'-6"	Awning	Obscure glass
D	1	Foyer	2'-0" x 5'-6"	2'-6"	Fixed, reeded glass	Tempered (CRC R308.4.2)
E	1	Dining	12'-0" x 6'-0"	2'-0"	Fixed, two units mulled	
F	1	Kitchen	5'-0" x 4'-0"	4'-0"	Horizontal slider	
G	1	Laundry	3'-6" x 2'-0"	6'-0"	Awning	
H	1	Primary Bath	4'-0" x 2'-6"	5'-6"	Awning	
J	1	Office	4'-0" x 2'-0"	6'-0"	Awning	
K	1	Reading Nook	3'-0" x 3'-6"	3'-6"	Awning	
L	1	Lounge	18'-0" x 3'-0"	12'-1½"	Fixed, 3 units mulled	Clerestory

LEGEND

- 1 — Door tag (see door schedule)
- A — Window tag (see window schedule)
- SD — Smoke alarm (SD), smoke / CO alarm (SD/CO)
- Overhead: canopy, attic hatch, skylight
- A — Section cut (sections on A-5)

ACOSTA RESIDENCE

Single-family residence
fire rebuild (Eaton Fire)

220 Laurel Dr
Altadena, CA 91001
APN 5832-003-027

Zone R-1 · Altadena CSD
Very High Fire Hazard Severity Zone

Owner: Richard Acosta

Prepared by: _____

Structural: by engineer (separate sheets)


DRAFT FOR REVIEW not for construction

Date: October 15, 2026
Revision date: October 28, 2026

© 2026 Richard Acosta. All rights reserved. These drawings are for 220 Laurel Dr only. Not to be copied, adapted, sold or built from on any other site.

FLOOR PLAN, DOOR & WINDOW SCHEDULES

A-2

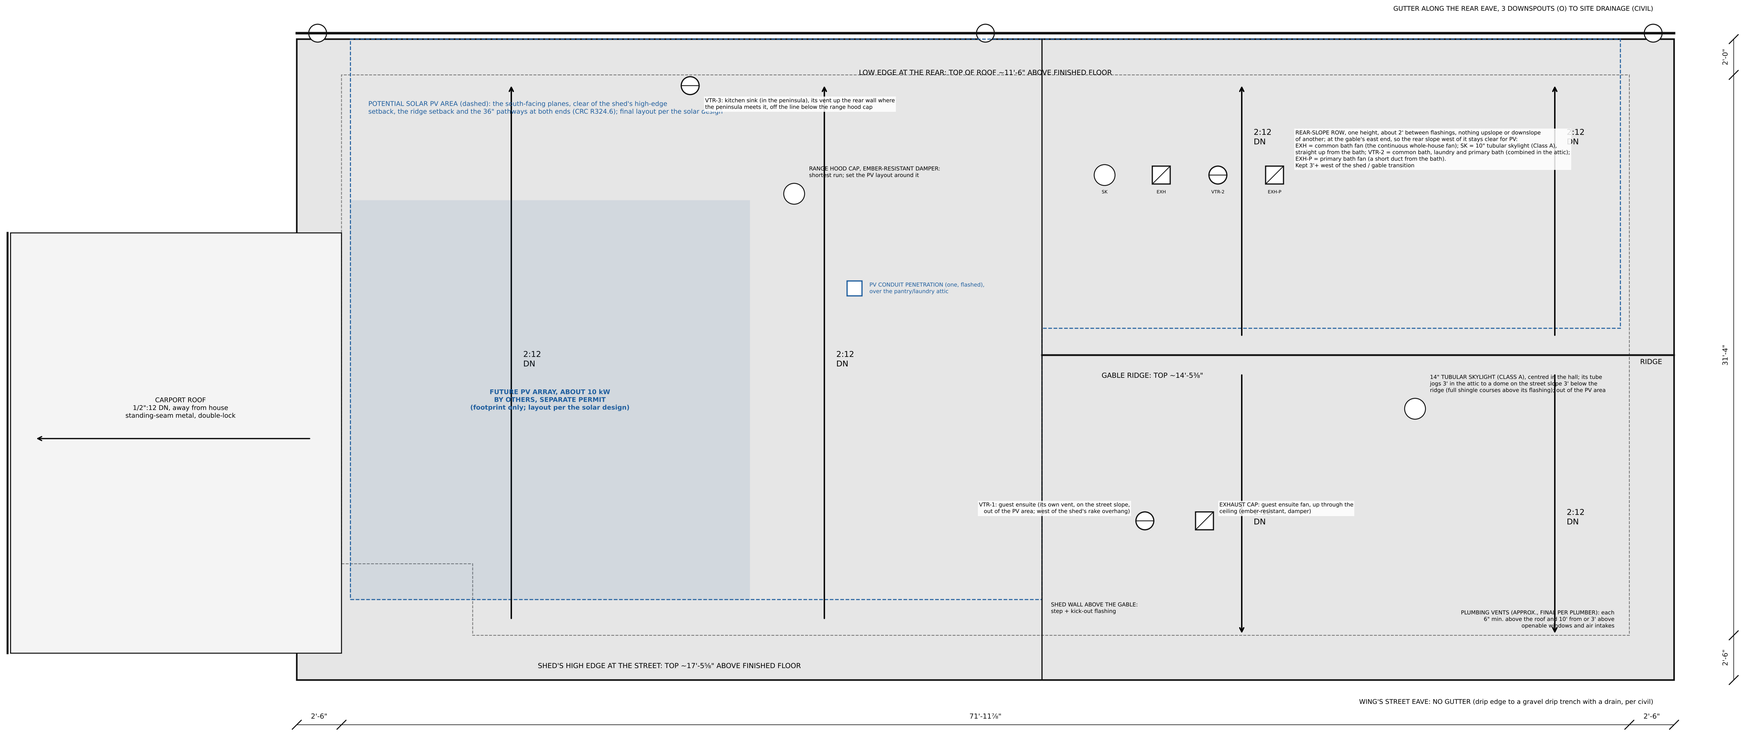

ROOF PLAN 1/4" = 1'-0"

ROOF NOTES

1. Main roof at 2:12: a shed from the porch into the bedroom wing, high at the street, and a gable over the rest of the wing. Class A asphalt shingles (fiberglass), dark, wind-rated (ASTM D7158 Class H / D3161 Class F), over two layers of underlayment as required at 2:12 (CRC R905.2); self-adhered underlayment at the eaves and along the shed / gable junction.
2. Sealed (unvented) attic, CRC R806.5: insulation at the roof deck; NO attic or eave vents.
3. Eaves 2'-6" (the rear 2'-0"), enclosed; dark metal fascia, drip edge. See A-6 for fire-zone details (CRC R337).
4. Rear gutter with noncombustible gutter guards (CRC R337.5.4); downspouts to the site drainage system per civil. No gutter on the wing's street eave: drip edge over a gravel drip trench.
5. Roof framing, sheathing and connections per structural.
6. Roof penetrations flashed per the shingle maker, metal flashings, all outside the first PV array. Plumbing vents (VTR): the guest ensuite's on the wing's street slope; the kitchen's at the rear wall line; the baths and laundry on the wing's rear slope. The hall skylight's dome is on the street slope. Exhaust caps metal, ember-resistant, with dampers: the range hood and all three bath fans through the roof (the common bath's is the continuous whole-house fan, apart from its skylight; the primary bath's straight up from the bath). No wall caps. No dryer vent (ventless dryer).
   Penetrations side by side across the slope, never one directly upslope of another; about 2" between flashings; clear of the eaves, ridge, the shed / gable transition and the shed's rake overhang above the gable.
7. Carport: attached open carport, its own roof at 1/2":12 in double-lock standing seam (Class A assembly, uplift-rated), gutter on its east edge.
8. Solar: first array (about 10 kW) on the shed, footprint shown; layout by the solar provider, separate permit. Its mounting (rails over flashed attachments into the rafters) is installed with the roofing; panels later. Its conduit enters through the roof into the attic and runs inside to the panel: none on the roof surface or the exterior walls.
9. Wind: severe downslope winds from the north / northeast strike the shed's high street edge. Wind-rated shingles with the maker's high-wind nailing, sealed starter strips at eaves and rakes; eave and carport tie-downs per structural.

ACOSTA RESIDENCE

Single-family residence
fire rebuild (Eaton Fire)

220 Laurel Dr
Altadena, CA 91001
APN 5832-003-027

Zone R-1 · Altadena CSD
Very High Fire Hazard Severity Zone

Owner: Richard Acosta

Prepared by: _____

Structural: by engineer (separate sheets)

DRAFT FOR REVIEW
not for construction


Date: October 15, 2026
Revision date: October 28, 2026

© 2026 Richard Acosta. All rights reserved. These drawings are for 220 Laurel Dr only. Not to be copied, adapted, sold or built from on any other site.


ROOF PLAN

A-3


NORTH (STREET) ELEVATION

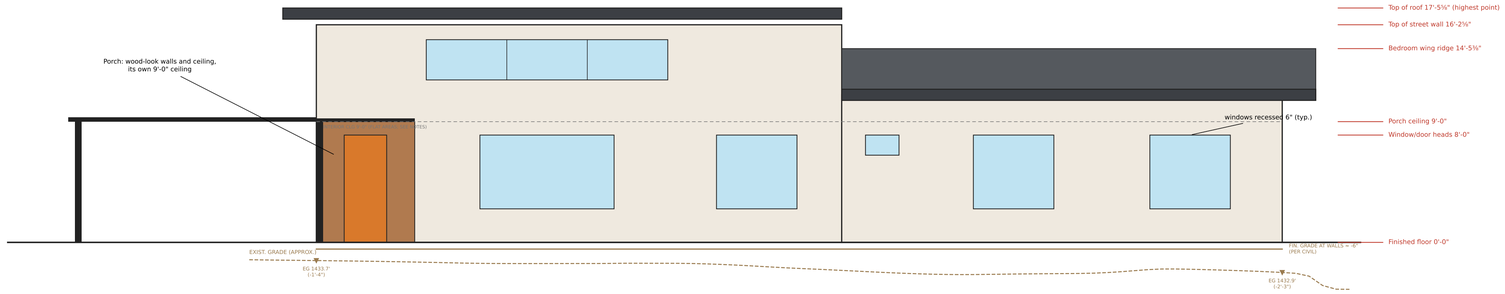

SOUTH (REAR) ELEVATION

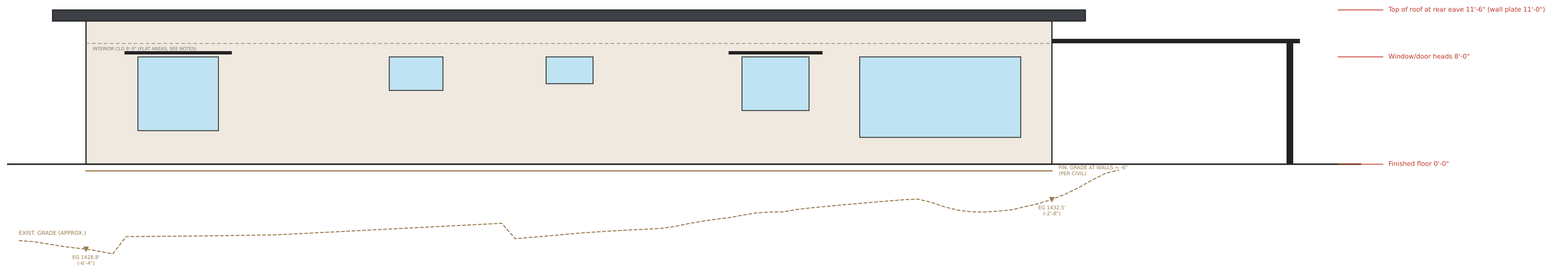


EAST (CARPORT) ELEVATION

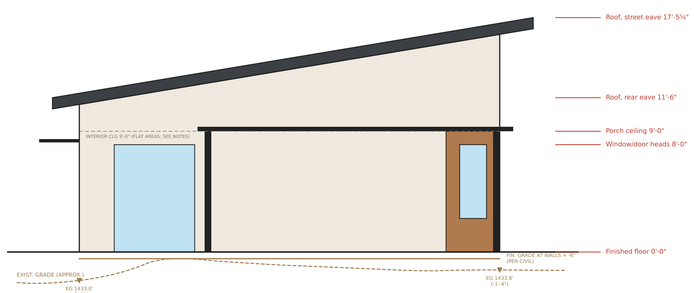

The existing retaining wall at the east property line (A-1) is in the foreground of this view and not drawn: it remains.

WEST ELEVATION

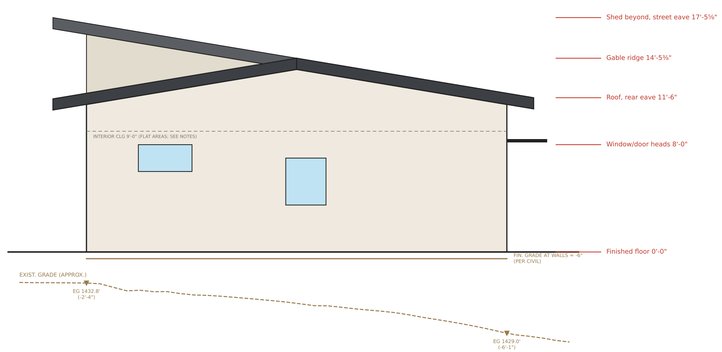


EXTERIOR MATERIALS AND COLORS
1. Walls: 3-coat stucco (noncombustible), smooth finish, color: warm off-white.
2. Roof: asphalt shingles, Class A (A-3), color: charcoal; carport roof standing-seam metal, dark gray.
3. Fascia, drip edge, canopies, carport posts and beam, fences and gates: metal, color: matte black.
4. Porch walls and ceiling: wood-look fiber cement or porcelain (noncombustible / ignition-resistant), color: warm mid-brown wood tone. Front door: orange. Window frames: black. Fences: aluminum privacy fence (posts and panels), detail this sheet.
5. Windows: dual-pane, one pane tempered (CRC R337.8); punched street windows recessed 6" (clerestory band flush). See A-2 schedule.
6. Eave soffits enclosed, no vents (A-6).
7. Existing grade (dashed) is approximate, from the survey with an assumed finished floor; finished grades and floor elevation per civil.


Heights are above finished floor (0'-0"). Assumed finished floor: 1435.1' (6" above the highest existing grade at the walls).
Scale: 3/16" = 1'-0"

CEILING HEIGHTS
Flat ceilings 9'-0" (bedroom wing, baths, hall, laundry, pantry); reading nook 7'-6"; porch 9'-0". Great room (foyer, lounge, dining, kitchen) vaulted under the roof, from about 11'-1½" at the rear wall to about 16'-1⅛" at the street wall (A-5).

GRADING (preliminary; per civil)
Finished floor set just above the high (street / carport) side; finished grade about 6" below the floor at the walls all around, sloping away (CRC R401.3). The lot falls about 5' from there to the rear west corner (existing grade about 6' below the floor), so the pad is mostly fill: roughly 120 cu yd, little cut, at the assumed floor level; the low corner may need a stepped foundation or a low wall (per civil). No new retaining walls; the burned house's retaining wall and chimney are removed; the east-line retaining wall remains.

FENCES, GATES AND WALLS (TYPICAL) 1/4" = 1'-0"

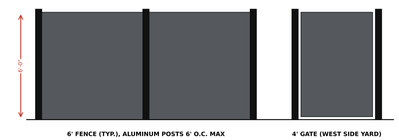

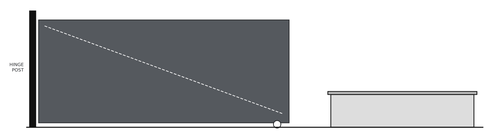

Locations and heights on A-1. Fences and gates 6' above finished grade: aluminum privacy fence, aluminum posts and solid panels, matte black to match the carport (noncombustible: they meet the house in the fire zone); posts and footings sized for wind on a solid fence. The carport gate opens flat against the house wall on its own post, not hung from the stucco. Seat wall: concrete or block with a smooth cap, stucco to match the house.

ACOSTA RESIDENCE

Single-family residence
fire rebuild (Eaton Fire)

220 Laurel Dr
Altadena, CA 91001
APN 5832-003-027

Zone R-1 · Altadena CSD
Very High Fire Hazard Severity Zone

Owner: Richard Acosta

Prepared by: _____

Structural: by engineer (separate sheets)


DRAFT FOR REVIEW
not for construction

Date: October 15, 2026
Revision date: October 28, 2026


© 2026 Richard Acosta. All rights reserved. These drawings are for 220 Laurel Dr only. Not to be copied, adapted, sold or built from on any other site.

EXTERIOR ELEVATIONS


A-4

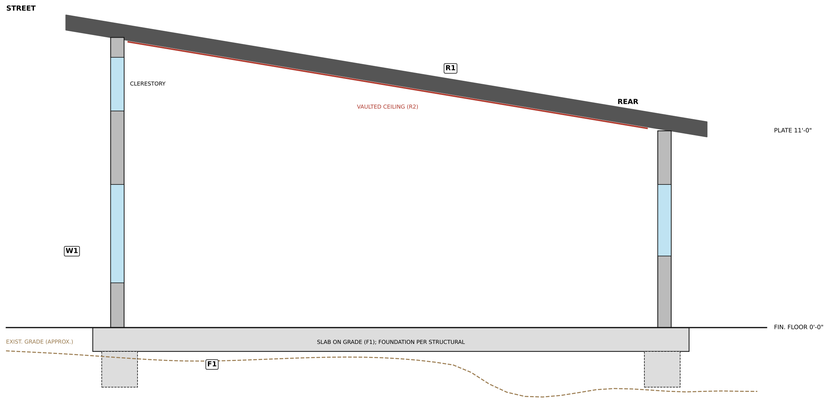

SECTION A: THROUGH THE LOUNGE AND KITCHEN (VAULTED) 1/4" = 1'-0"

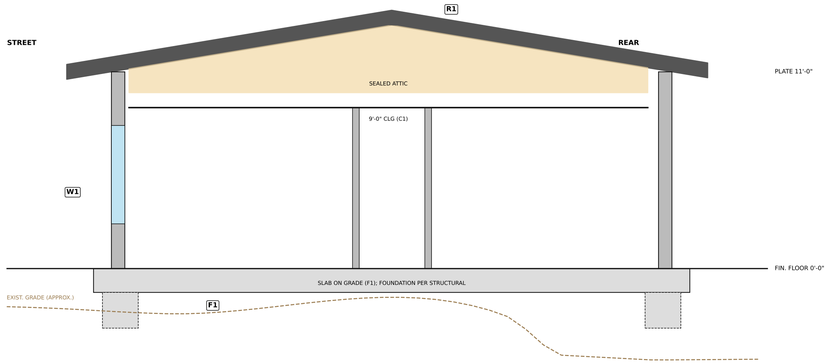

SECTION B: THROUGH THE GUEST ROOM, LOBBY AND DRESSING ROOM (GABLE) 1/4" = 1'-0"

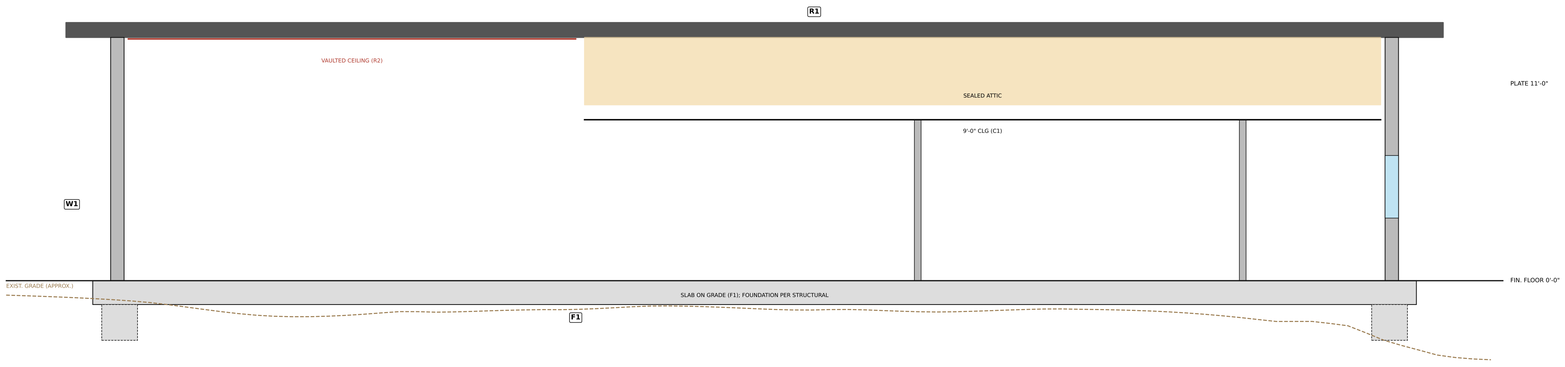

SECTION C: ALONG THE LOBBY, LOOKING SOUTH 1/4" = 1'-0"

ASSEMBLIES (insulation values per the Title 24 report)
R1 ROOF: Class A asphalt shingles on two layers of underlayment (2:12), roof sheathing, framing per structural; spray foam at the underside of the deck (unvented, CRC R806.5); ignition barrier / thermal barrier where the attic is used.
R2 VAULT: as R1, gypsum board on the framing (no attic).
C1 CEILING (9'-0"): 5/8" gypsum board; sealed attic above.
W1 EXTERIOR WALL: 7/8" 3-coat stucco, weather barrier, 1" rigid insulation, sheathing, 2x6 studs with cavity insulation, 1/2" gypsum board.
W2 INTERIOR WALL: 2x4 (plumbing walls 2x6), gypsum both sides; sound insulation at bedrooms, baths, laundry.
F1 FLOOR: concrete slab on grade over vapor retarder and capillary break (CALGreen 4.505.2); foundation, slab and footings per structural; floor level per civil.

Section cuts: A at the lounge / kitchen, B at the guest room, C along the lobby (see A-2). Heights above finished floor; existing grade approximate (survey, assumed floor 1435.1').

ACOSTA RESIDENCE

Single-family residence
fire rebuild (Eaton Fire)

220 Laurel Dr
Altadena, CA 91001
APN 5832-003-027

Zone R-1 · Altadena CSD
Very High Fire Hazard Severity Zone

Owner: Richard Acosta

Prepared by: _____

Structural: by engineer (separate sheets)


DRAFT FOR REVIEW
not for construction

Date: October 15, 2026
Revision date: October 28, 2026


© 2026 Richard Acosta. All rights reserved. These drawings are for 220 Laurel Dr only. Not to be copied, adapted, sold or built from on any other site.

BUILDING SECTIONS


A-5

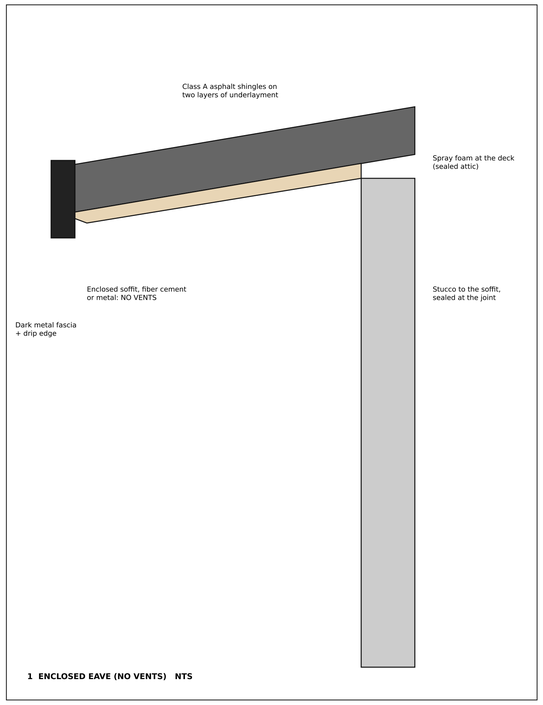


1 ENCLOSED EAVE (NO VENTS) NTS

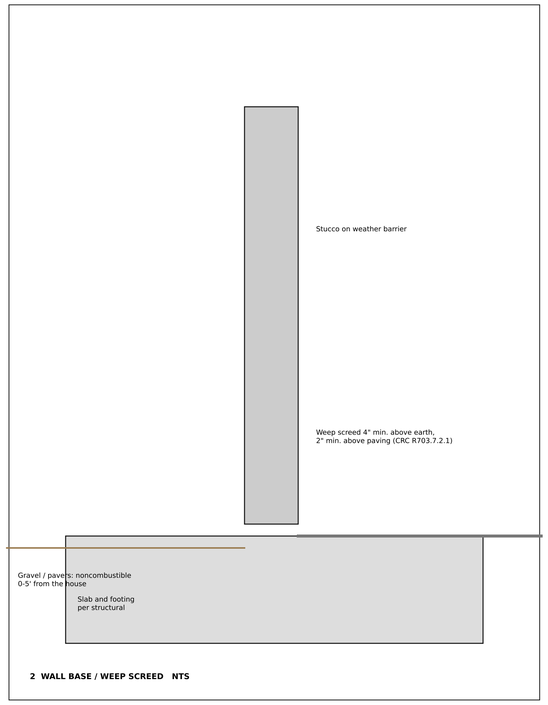

2 WALL BASE / WEEP SCREED NTS

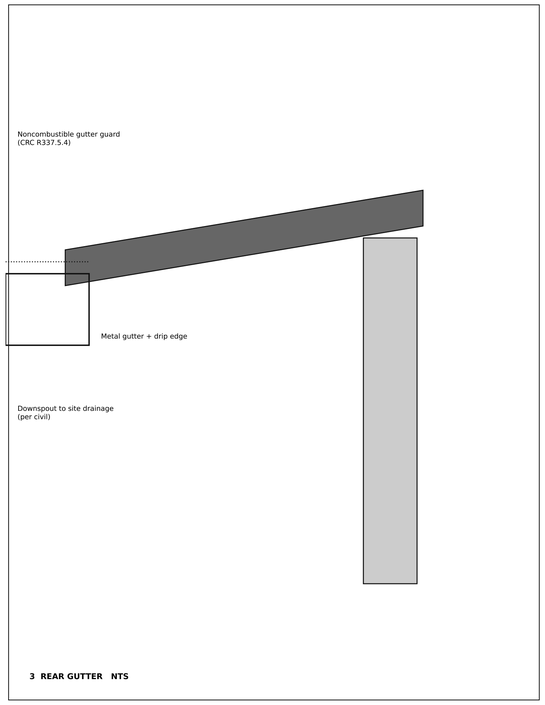

3 REAR GUTTER NTS

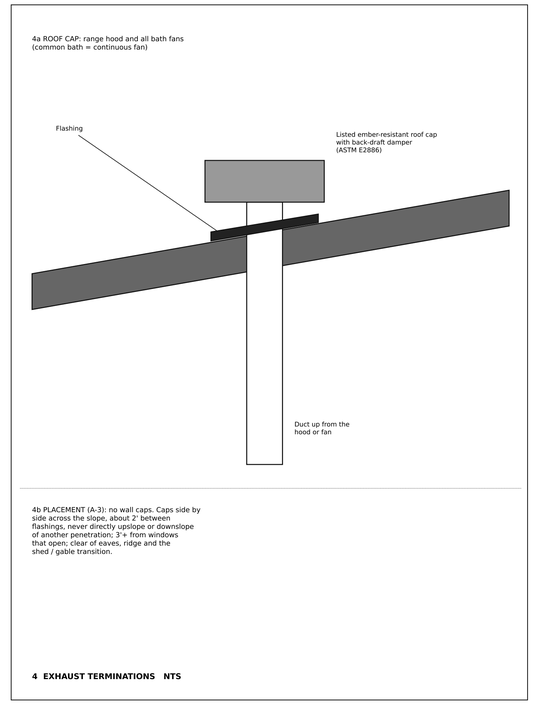

4 EXHAUST TERMINATIONS NTS

WILDLAND-URBAN INTERFACE REQUIREMENTS (VERY HIGH FIRE HAZARD SEVERITY ZONE)

CRC	ITEM	THIS PROJECT
R337.5	Roof	Class A asphalt shingles; eave and rake edges, ridge cap and the shed / gable junction closed and sealed so embers can't get under them. Carport: standing seam, Class A.
R337.5.4	Gutters	Noncombustible gutter guards on all gutters.
R337.6	Vents	No attic or eave vents (sealed attic). Exhaust and hood terminations: listed ember-resistant vents (ASTM E2886) or noncombustible 1/16"–1/8" mesh with dampers.
R337.7	Exterior walls	3-coat stucco (noncombustible). Porch cladding: noncombustible or ignition-resistant wood-look (fiber cement / porcelain).
R337.7.5	Eaves, soffits	Enclosed soffits, noncombustible or ignition-resistant (fiber cement or metal); fascia dark metal. Porch ceiling the same.
R337.8.2	Glazing	Dual-pane, at least one tempered pane, all windows, doors, skylight, clerestory.
R337.8.3	Exterior doors	Noncombustible, ignition-resistant, or solid core at least 1-3/8" thick.
R337.9	Decks	None. At-grade concrete landing and entry court only.
R337.10	Carport, fences	Carport roof Class A; framing within 5' of the house noncombustible or ignition-resistant. Fences and gates within 5' of the house noncombustible.
--	Zone 0 (0-5')	Noncombustible ground cover (gravel, pavers, concrete) within 5' of the house; no bark mulch or plants against the walls.

ACOSTA RESIDENCE

Single-family residence
fire rebuild (Eaton Fire)

220 Laurel Dr
Altadena, CA 91001
APN 5832-003-027

Zone R-1 · Altadena CSD
Very High Fire Hazard
Severity Zone

Owner: Richard Acosta

Prepared by: _____

Structural: by engineer
(separate sheets)


**DRAFT FOR REVIEW
not for construction**

Date: October 15, 2026
Revision date: October 28, 2026

© 2026 Richard Acosta.
All rights reserved.
These drawings are for
220 Laurel Dr only. Not to
be copied, adapted, sold
or built from on any
other site.

**FIRE-ZONE
DETAILS
(CRC R337)**

A-6

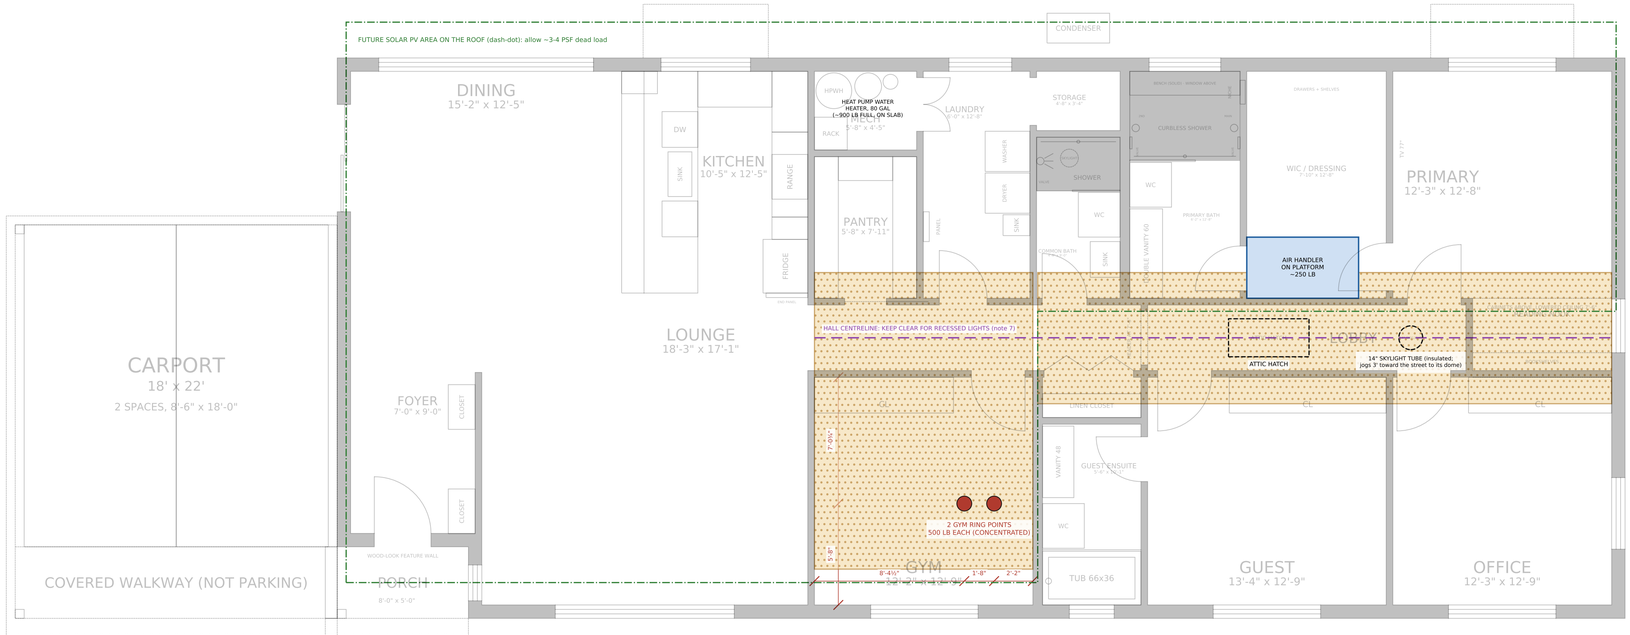

ATTIC STORAGE (hatched): 20 PSF LIVE LOAD, PLYWOOD DECKED (note 2)
under the shed: over the gym from 2'-0" off the street wall and across the hall;
under the gable: a 7'-4" strip along the ridge (clear of the air handler, hatch, walkway and skylight tube)

ATTIC AND LOADS PLAN 1/4" = 1'-0"

LOAD NOTES (for the structural engineer and truss designer)

1. Gym ring points: two eye bolts 20" apart, about 3' off the west (ensuite) wall, a little toward the street; rings swinging street-to-hall. The east side of the room stays clear for a rack. The pair may shift toward the street or the hall to suit the framing, keeping: 20" apart (centre to centre); their centre at least 3' off the west wall; at least 4'-6" from the street wall; and the swing clear of the gym door. 500 lb concentrated at each, dynamic: blocking across several trusses or joists with framing connectors; through-bolted forged eye bolts with plate washers.
2. Attic storage: 20 psf live load on the decked areas shown (hatched), wherever the roof's underside is at least 4' above the ceiling: under the shed (over the gym and across the hall) and a strip along the gable's ridge, over the hall. Light storage only. Open-web (or attic-frame) trusses there, so the storage runs continuously rather than in 2' bays.
3. Air handler: on a platform beside the attic hatch, near the ridge, over the primary dressing room (short line set to the rear condenser; condensate to the laundry's drains), with a 30" walkway, light and outlet (mechanical code).
4. Future solar: on the roof plane, clear of the fire setbacks (A-3); include its dead load in the roof design.
5. Heat pump water heater: on the slab in the mechanical closet.
6. Vaulted great room: no attic and no loads above the ceiling.
7. Bedroom hall ceiling: keep the hall's centreline free of blocking, strongbacks, ducts and pipes, so recessed lights fit between the trusses along it (clear of the hatch, smoke alarm and return grille). Run the duct trunk to one side. The 14" skylight takes the last spot, near the end; its tube jogs toward the street in the attic (two elbows) to its dome.

ACOSTA RESIDENCE

Single-family residence
fire rebuild (Eaton Fire)

220 Laurel Dr
Altadena, CA 91001
APN 5832-003-027

Zone R-1 · Altadena CSD
Very High Fire Hazard Severity Zone

Owner: Richard Acosta

Prepared by: _____

Structural: by engineer (separate sheets)

DRAFT FOR REVIEW
not for construction

Date: October 15, 2026
Revision date: October 28, 2026

© 2026 Richard Acosta.
All rights reserved.
These drawings are for 220 Laurel Dr only. Not to be copied, adapted, sold or built from on any other site.

ATTIC AND STRUCTURAL LOADS PLAN

A-7